



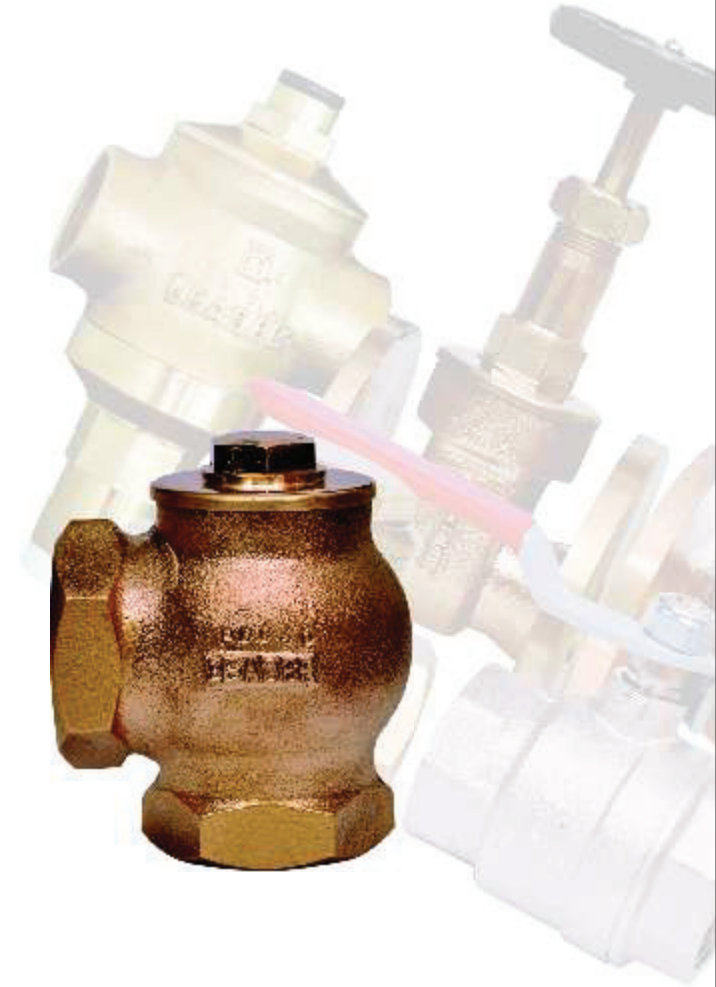

# G.M. / BRONZE HORIZONTAL LIFT CHECK VALVES (Angle Type)

## SPECIFICATIONS

SCREWED IN COVER, INTEGRAL SEAT, RESILIENT SEATED,  
SCREWED FEMALE BSP  
PARALLEL THREADS TO BS 21.  
Other Forms of Threads Can Be Provided on Request.

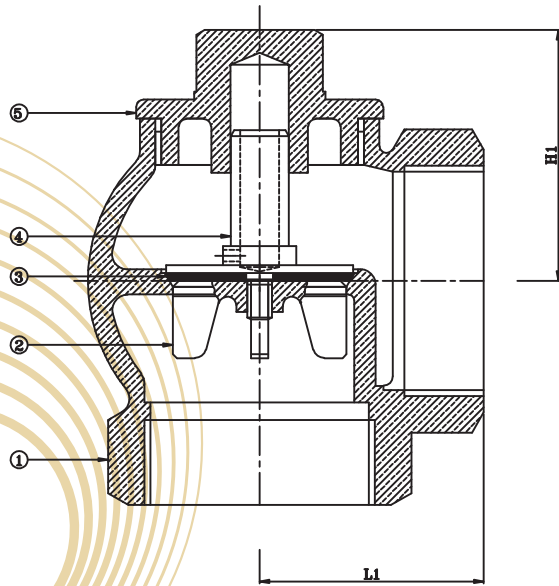

## STANDARD MATERIAL COMBINATION

P. NO.	DESCRIPTION	MATERIALS	SPECIFICATIONS
1.	BODY	G.M.	BSEN 1982 Gr. CC491K
2.	DISC	G.M.	BSEN 1982 Gr. CC491K
3.	WASHER	Brass	---
4.	STEM	G.M.	BSEN 1982 Gr. CC491K
5.	COVER	G.M.	BSEN 1982 Gr. CC491K

## DIMENSIONAL DATA

SIZE (mm)	8	10	15	20	25	32	40	50	65	80	100
L1	-	-	24	31	35	43	48	58	70	81	112
Øb	9.5	9.5	11	16	22.5	29	35	45	63.5	76.2	96
H1	-	-	25	30	40	45	50	65	90	55	110
Aprox. Wt. <sup>▲</sup>	--	--	0.205	0.340	0.570	0.995	1.290	2.090	---	---	---
ITEM CODE	GM033	GM033	GM033	GM 033	GM 033	GM 033	GM 033	GM 033	GM 033	GM033	GM033

## TEST PRESSURES

NOMINAL PRESSURE ACCORDING TO PN OR CLASS DESIGNATION	SHELL TEST (HYDROSTATIC)	SEAT TEST (HYDROSTATIC)	STANDARD NO.
PN 16	24 bar	17.6 bar	EN 12266 PART 1

NOTE: The above data is subject to change without notice due to our continuing product improvement program. (▲ WEIGHT GIVEN IN KGS)