



## → Globe Valve


### Technical Specification

<b>Design Standard</b>	ISO 15761
<b>Testing Standard</b>	API 598
<b>Face to Face Standard</b>	Manufacturer's Standard
<b>Socket Weld Standard</b>	ASME B16.11
<b>Screwed End Standard</b>	ASME B1.20.1
<b>Butt Weld Standard</b>	ASME B16.25
<b>Flange End Standard</b>	ASME B16.5

### Material of Construction

18	BACK SEAT	INTEGRAL	INTEGRAL	INTEGRAL	INTEGRAL	INTEGRAL
17	GLAND PACKING	FLEXIBLE GRAPHITE RINGS	FLEXIBLE GRAPHITE RINGS	FLEXIBLE GRAPHITE RINGS	FLEXIBLE GRAPHITE RINGS	FLEXIBLE GRAPHITE RINGS
16	HAND WHEEL	MI / SGIRON	MI / SGIRON	MI / SGIRON	MI / SGIRON	MI / SGIRON
15	NAME PLATE	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
14	STEM NUT	ASTM A 194 GR. 2H	ASTM A 194 GR. B8	ASTM A 194 GR. B8M	ASTM A 194 GR. 2H	ASTM A 194 GR. B8M
13	YOKE SLEEVE	ASTM A 582 GR. SS-416	ASTM A 582 GR. SS-303	ASTM A 582 GR. SS-303	ASTM A 582 GR. SS-416	ASTM A 582 GR. SS-303
12	EYE BOLT NUT	ASTM A 194 GR. 2H	ASTM A 194 GR. B8	ASTM A 194 GR. B8M	ASTM A 194 GR. 2H	ASTM A 194 GR. B8M
11	GLAND FLANGE	ASTM A 105	ASTM A 182 GR. F-304	ASTM A 182 GR. F-316	ASTM A 182 GR. F-22	ASTM A 182 GR. F-51
10	EYE BOLT	ASTM A 193 GR. B7	ASTM A 182 GR. F-304	ASTM A 182 GR. F-316	ASTM A 193 GR. B7	ASTM A 182 GR. F-316
09	GLAND BUSH	ASTM A 276 TYPE SS-410	ASTM A 276 TYPE SS-304	ASTM A 276 TYPE SS-316	ASTM A 276 TYPE SS-410	ASTM A 182 GR. F-51
08	EYE BOLT PIN	ASTM A 276 TYPE SS-410	ASTM A 276 TYPE SS-304	ASTM A 276 TYPE SS-316	ASTM A 276 TYPE SS-410	ASTM A 276 TYPE SS-316
07	HEX BOLT (*)	ASTM A 193 GR. B7	ASTM A 193 GR. B8	ASTM A 193 GR. B8M	ASTM A 193 GR. B16	ASTM A 193 GR. B8M
06	BONNET	ASTM A 105	ASTM A 182 GR. F-304	ASTM A 182 GR. F-316	ASTM A 182 GR. F-22	ASTM A 182 GR. F-51
05	GASKET (*)	SS-304 SPW+GRAPHITE	SS-304 SPW+GRAPHITE	SS-316 SPW+GRAPHITE	SS-304 SPW+GRAPHITE	SS-316 SPW+GRAPHITE
04	STEM	ASTM A 182 GR. F6a	ASTM A 182 GR. F-304	ASTM A 182 GR. F-316	ASTM A 182 GR. F6a	ASTM A 182 GR. F-51
03	PLUG	ASTM A 217 GR. CA-15	ASTM A 351 GR. CF8	ASTM A 351 GR. CF8M	ASTM A 217 GR. CA-15	ASTM A 182 GR. F-51
02	SEAT RING	13% CR. INTEGRAL	ASTM A 182 GR. F-304 INTEGRAL	ASTM A 182 GR. F-316 INTEGRAL	13% CR. INTEGRAL	ASTM A 182 F-51 INTEGRAL
01	BODY	ASTM A 105	ASTM A 182 GR. F-304	ASTM A 182 GR. F-316	ASTM A 182 GR. F-22	ASTM A 182 GR. F-51
	<b>DESCRIPTION</b>	<b>MATERIAL</b>	<b>MATERIAL</b>	<b>MATERIAL</b>	<b>MATERIAL</b>	<b>MATERIAL</b>
		MOC A 105	MOC F-304	MOC F-316	MOC F-22	MOC F-51

\*Marked Parts are not Applicable for Welded 2500#

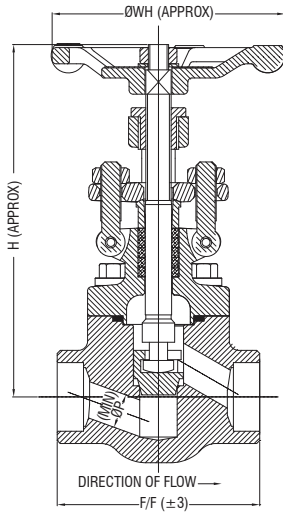


**BOLTED DESIGN**

**Dimensions**


800#	15mm (1/2")	20mm (3/4")	25mm (1")	32mm (1-1/4")	40mm (1-1/2")	50mm (2")
F/F (mm)	73	80	100	145	145	160
ØP (mm)	9.5	12.7	17.5	23.8	28.6	36.5
H OPEN (mm)	159	162	191	228	228	265
H CLOSE (mm)	143	146	171	199	199	236
ØWh (mm)	86	86	116	150	150	150
Approx. Weight (Kg)	1.6	1.8	3.1	6.6	6.3	9.4

1500#	15mm (1/2")	20mm (3/4")	25mm (1")	32mm (1-1/4")	40mm (1-1/2")	50mm (2")
F/F (mm)	80	100	145	145	160	172
ØP (mm)	8.5	9.5	14.5	20.5	25.5	27.5
H OPEN (mm)	160	174	224	224	239	318
H CLOSE (mm)	148	187	204	204	261	290
ØWh (mm)	86	116	150	150	150	225
Approx. Weight (Kg)	1.9	3.1	6.6	6.5	10	15

2500# Straight Type	15mm (1/2")	20mm (3/4")	25mm (1")	32mm (1-1/4")	40mm (1-1/2")	50mm (2")
F/F (mm)	100	145	160	172	172	-
ØP (mm)	7	12.5	15.5	21.5	26.5	-
H OPEN (mm)	178	227	256	303	303	-
H CLOSE (mm)	162	207	224	263	263	-
ØWh (mm)	116	150	150	225	225	-
Approx. Weight (Kg)	3.1	6.5	10	15.1	15	-

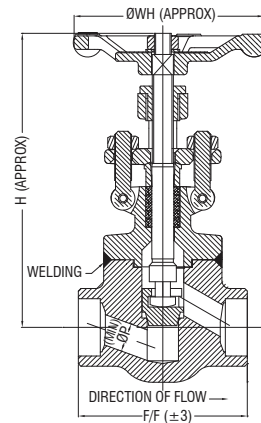


**WELDED DESIGN**

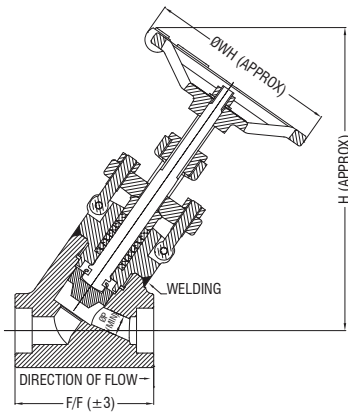

**Y TYPE WELDED DESIGN**

2500# Y Type	15mm (1/2")	20mm (3/4")	25mm (1")	32mm (1-1/4")	40mm (1-1/2")	50mm (2")
F/F (mm)	85	100	105	145	145	145
ØP (mm)	7	12.5	15.5	21.5	26.5	27
H OPEN (mm)	180	222	231	324	324	345
H CLOSE (mm)	175	212	219	309	309	330
ØWh (mm)	116	150	150	225	225	225
Approx. Weight (Kg)	2.5	4	4.6	13.1	13	15

150#	15mm (1/2")	20mm (3/4")	25mm (1")	32mm (1-1/4")	40mm (1-1/2")	50mm (2")
F/F (mm)	108	117	127	140	165	203
ØP (mm)	9.5	12.7	17.5	23.8	28.6	36.5
ØA (mm)	15.7	20.9	26.7	35	40.9	52.5
ØF (mm)	90	100	110	115	125	150
FT (mm)	9.6	11.2	12.7	14.3	15.9	17.5
ØRF (mm)	34.9	42.9	50.8	63.5	73	92.1
RFH (mm)	1.7	1.7	1.7	1.7	1.7	1.7
PCD (mm)	60.3	69.9	79.4	88.9	98.4	120.7
Approx. Weight (Kg)	2.2	2.9	4.7	4.9	9	12.5

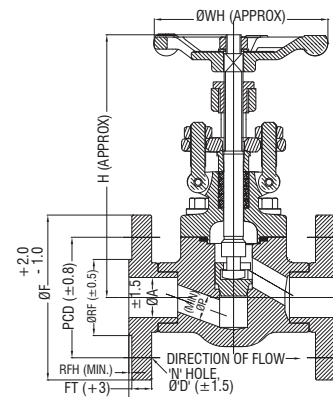

**FLANGE END DESIGN**

\*Flange End Valve also Available in 300#, 600# & Above Class on Request.